


Quick reference guide: Bluetooth update on Audio blue, Audio compact and Audio com

Author: Andre Hennig

To load new firmware into hands-free kit, the system must first be switched to receive update mode.

To do this, select “ Settings” from the main menu, followed by “Service” and “SW Update”.


The display now shows the message *Waiting for connection*.

The hands-free kit is now ready to receive an update via Bluetooth.

The next step is to connect the system to a PC equipped with a Bluetooth interface. The PC operating system Windows XP and all earlier versions do not support Bluetooth interfaces as standard. However, a wide range of driver software is available to upgrade this capability on Windows. This software is often supplied as a Driver-CD when purchasing a Bluetooth dongle.

From Windows XP Service Pack 2, Bluetooth interfaces are supported directly by Microsoft. With Windows XP it is recommended that you install a free update to Version SP2 and not use third-party driver software. Any drivers that have already been loaded should be uninstalled.


When a Bluetooth interface is detected, the appropriate symbol appears in the Windows notification area.




The hands-free kit can be added as a new Bluetooth connection by right-clicking on this symbol and selecting the first menu item, “Add Bluetooth device”.



A wizard page is launched, in which you will need to activate the option “Device is set up and can be detected”. Press “Next” and the system will search for and list all the Bluetooth devices that are in range.

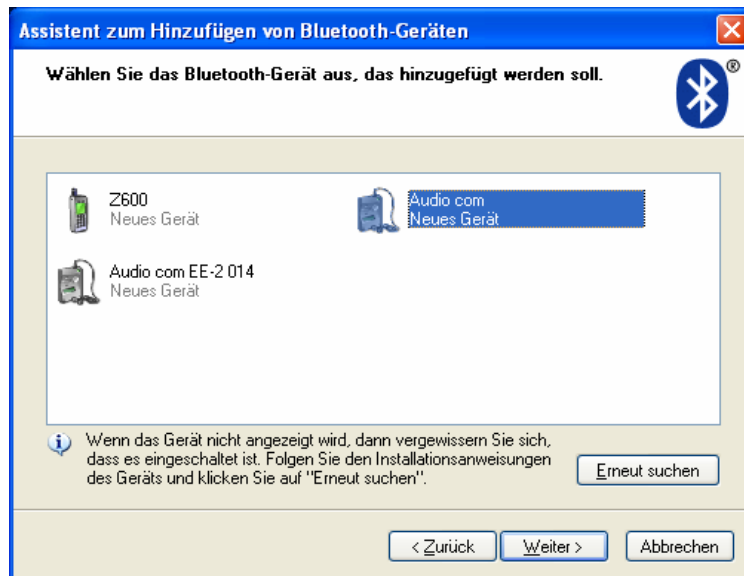

When you select the hands-free kit and press “Next”, a dialogue box appears, in which you can enter the passkey.

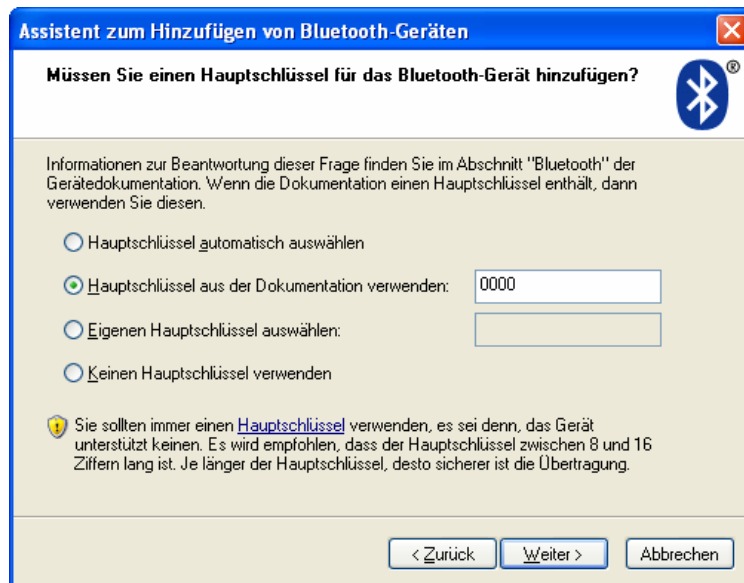

Select “Use main passkey from the documentation” and enter the passkey number “0000”.

Click “Next” and the services available from the hands-free kit will be integrated into Windows.



The “Outgoing COM connection”, in this example COM20, is important.

The hands-free kit is now connected to the PC and an update can be loaded via the update software.


To this end, the compressed update file must first be unpacked into a separate directory. The update consists of two files: the executable program *FWD_Update.exe* and the update file *Update_XX_XX_XX.upd*.

After *FWD_Update.exe* is started, select the “Outgoing COM connection” (which has been detected beforehand) in the “Interface” combination box.



When you press the Update button, you will be prompted to select the update file you wish to load. Here you will need to select the unpacked file *Update_XX_XX_XX.upd*.

The system will then start to transfer the new application.

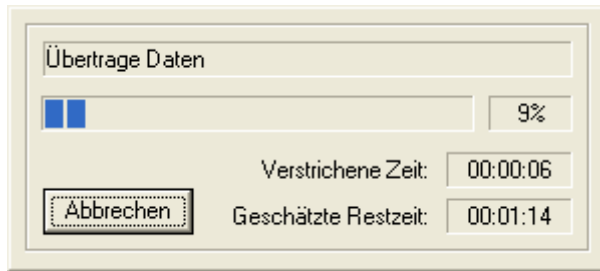

When the transfer process is complete, the system will need to be restarted.
If the following symbol appears the next time the system starts up,



the application was transferred successfully and will now be installed.

The next symbol



signifies the update of the display software, which can be used to implement font extensions and graphical changes.

When this is finished, the software update for the hands-free kit is complete.